



Thermal-Hinge Cover



Features.

- One-handed, easy-open, hinged latch provides ventilation and egress.
- Saves energy. Fluted polycarbonate design increases the thermal performance of any basement window.
- Heavy duty construction withstands loads of more than 44 pounds per square foot.
- Sloped for runoff of rain, snow.
- Available in aluminum mill finish frame or white.
- Sizes to fit deluxe straight, Stif Back II and Garden Step area walls.
- Also available in special/custom sizes.



We bring light and life to basements.

MONARCH
Manufacturing Company

P.O. Box 250, Waukegan, IA 50263 515-993-4561 800-343-9370 www.MonarchManufacturing.com
1850 W. Adriatic Pl., Englewood, Colorado 80110, Phone: (303) 935-4679, Fax: (303) 935-4670


THC01 5-7 5000

MONARCH


Manufacturing Company

Special Sizing Thermal-Hinge Cover Order Form

The Thermal-Hinge Cover requires a minimum of 5 1/2 inches from the top of your area wall to the top of the mounting flange. If less than 5 1/2 inches, dimension "A" will need to be taken from the siding.



1.) Please **Circle** the number that best represents the shape of your area wall.

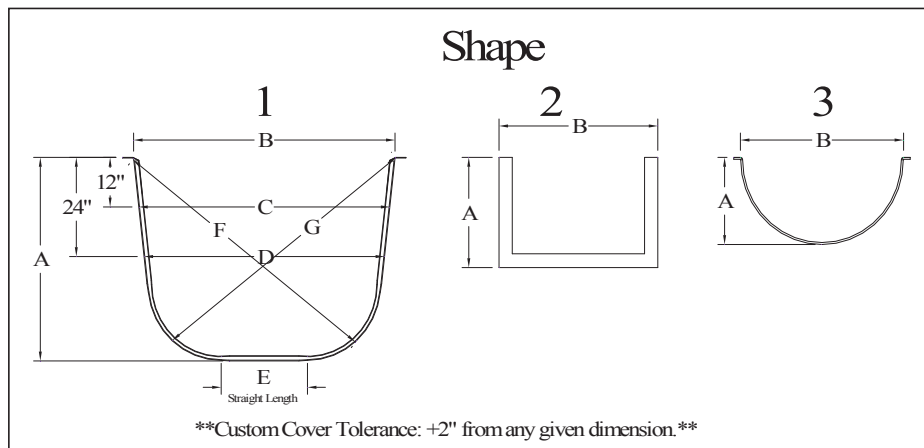


2.) Measure and write down the corresponding **outside to outside** measurements for your shape.

Projection	Width at House	Width at 12"	Width at 24"	Front	Diagonal	Diagonal
A (Inches)	B (Inches)	C (Inches)	D (Inches)	E (Inches)	F (Inches)	G (Inches)

3.) Which corrugation pattern do you have?

Please circle: 1, 2, 3



4.) Please circle the color edge trim you would like. **Mill Finish Aluminum** or **White**

5.) Monarch Part #: _____

Customer Name: _____
Customer's Address: _____

Customer's Phone: _____
Monarch Dealer Signature: _____
Monarch Dealer PO# _____ Date: _____

Note: The special order size Thermal-Hinge Covers cannot be returned.