

P.O. Box 190
Siloam Springs, AR 72761
479.524.5151
479.524.5464 Fax

PPFA

MEMBER
PLASTIC PIPE
AND FITTINGS
ASSOCIATION

PVC PIPE PERFORATION SPECIFICATIONS

PVC DRAINAGE PIPE ASTM D-2729

*Perf styles 1, 2 and 3 available

Size	O.D.	Wall	Length	Rows of Perforations	Hole Size	Hole Spacing Per Row Inches	Feet Per Pallet
3	3.250	.070	10'	2	5/8"	5	1560
4	4.215	.75	10'	2	5/8"	5	900'
6	6.275	.100	10'	2	5/8"	5	330'

PVC HIGHWAY UNDERDRAIN SYSTEMS ASTM F-758/D-3034

*Perf style 4 available

Size	O.D.	Wall	Length	Rows of Perforations	Hole Size	Hole Spacing Per Row Inches	Feet Per Pallet
4	4.215	.120	10'	4	1/4"	3	900'
6	6.275	.180	10'	4	1/4"	3	330'

PVC SDR 35 SEWER PIPE ASTM D-3034


*Perf styles 1 and 2 available

Size	O.D.	Wall	Length	Rows of Perforations	Hole Size	Hole Spacing Per Row Inches	Feet Per Pallet
4	4.215	.120	10'	2	5/8"	5	900'
6	6.275	.180	10'	2	5/8"	5	330'

PERFORATION STYLES


#1

Typical 2-Row Pattern
Conforms to ASTM D-2729




#2

3-hole 60°




#3

3-hole 120°

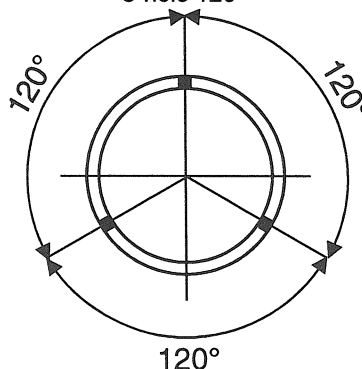

#4

Typical 4-Row Pattern
Conforms to ASTM F-758



Effective: 1-4-02